

Hardware Quick Start Guide

Q-SYS™ Camera Ceiling Mounting Bracket

Packing List

Item	Quantity
Quick Start Guide 1001163-01	1
Ceiling Mounting Bracket	1
Camera Mounting Bracket	1
Screw Kit (Six M3*6, one 1/4 20)	1



CAUTION! Do not carry the camera by the lens assembly. Do not turn the lens assembly by hand. Mechanical damage may occur.


Installation

Refer to Figure 1.



NOTE: The screw locations in Figure 1 are for illustration only. The holes are designed to mate to several standard electrical boxes. Make sure the electrical box is properly secured to the structure.

1. Select location, on the ceiling, where the camera is to be mounted, or locate the electrical box to which it will mount. Make sure the structure is strong enough to hold the weight of the camera and mounting brackets.

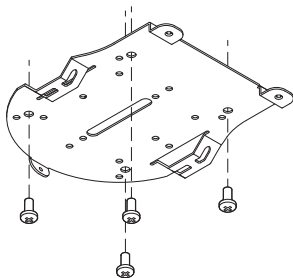

1001163-01-B



— Figure 1 —




WARNING! The camera weighs 1.35 kg (3.0 lb). The preferred mounting method is to secure the mounting plate to a structurally solid part of the ceiling such as a beam or standard electrical box. There are 18 holes in the mounting plate, in various patterns, that can be used to safely secure the plate to the ceiling or electrical box. Use the appropriate holes and screws for mounting. Consult a structural engineer if in doubt.

2. If not using an electrical box, use the ceiling mounting plate as a template to mark the location of the mounting holes onto the ceiling.
3. Secure the ceiling mounting bracket to the ceiling/structure or electrical box using the appropriate tools and hardware.

Refer to Figure 2.


4. Use a Phillips screwdriver, three M3*6 screws, and one 1/4 20 screw to secure the camera mounting bracket to the camera as shown.

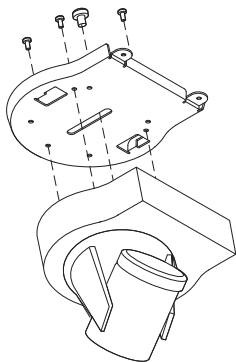

– Figure 2 –

Refer to **Figure 3**.


5. Carefully turn the camera and camera mounting bracket assembly upside down. Do not use the camera lens to support the camera.
6. Slide the camera mounting bracket hooks (A) into the slots (B) on the ceiling mounting bracket. When these are properly engaged, the camera mounting bracket will drop into place (C). This position is for holding the assembly while installing the screws in the next step.

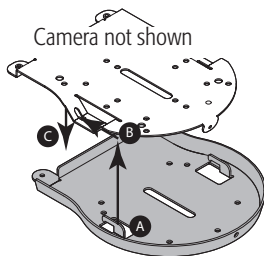

– Figure 3 –

Refer to **Figure 4**.

7. Use a Phillips screwdriver and three small screws to secure the camera assembly to the ceiling mounting bracket.

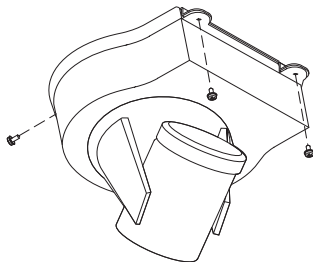

– Figure 4 –



Mailing Address:

QSC, LLC

1675 MacArthur Boulevard
Costa Mesa, CA 92626-1468 U.S.

Main Number: +1 (714) 754-6175

World Wide Web: www.qsc.com

Sales & Marketing:

Voice: +1 (714) 957-7100 or toll free
(U.S. only) (800) 854-4079

FAX: +1 (714) 754-6174

E-mail: info@qsc.com

Q-SYS Customer Support

Application Engineering and Technical Services

Monday - Friday 7 AM to 5 PM PST
(Excludes Holidays)

Tel. (800) 772-2834 (U.S. only)

Tel. +1 (714) 957-7150

Q-SYS 24/7 Emergency Support*

24/7

Q-SYS™ Customer Support

Tel: (888) 252-4836 (U.S./
Canada)

Tel: +1 (949) 791-7722 (non U.S.)

*Q-SYS 24/7 Support is for Emergency assistance with Q-SYS systems only. 24/7 support guarantees a call back within 30 minutes after a message is left. Please include, Name, Company, Call Back Number and description of the Q-SYS emergency for prompt call back. If calling during business hours please use the standard support numbers above.

Q-SYS Support Email

qsysupport@qsc.com

(Immediate e-mail response times not guaranteed)

QSC

Technical Services

1675 MacArthur Blvd.

Costa Mesa, CA 92626 U.S.

Tel: (800) 772-2834 (U.S. only)

Tel: +1 (714) 957-7150

FAX: +1 (714) 754-6173

© 2016-2017 QSC, LLC. All rights reserved. QSC, the QSC logo, Q-SYS, and the Q-SYS logo are registered trademarks of QSC, LLC in the U.S. Patent and Trademark Office and other countries. Patents may apply or be pending. All other trademarks are the property of their respective owners.

www.qsc.com/patents